

TA-1

Capacidad Capacity - Capacité

500 - 550 - 750 - 1000 - 1100 - 1500 - 1760 - 2000 kg

IP69K

Certified
N° 24/36405487
N° 24/36406077



Certificate
LOM 07ATEX2006



Certificate
N° E-01.02.C07

Hasta 4000 divisiones OIML-R60

Up to 4000 divisions OIML-R60

Jusqu'à 4000 divisions OIML-R60

Totalmente en acero inoxidable

Fully stainless steel

Totalement acier inoxydable

Disponible en soporte de acero aleado

Measuring element available from alloy steel

Disponible le support élastique en acier allié

Estanqueidad IP-69K (EN 60529:2018)

Protected against humidity IP-69K (EN 60529:2018)

Étanchéité IP-69K (EN 60529:2018)

Sellado hermético

Hermetically sealed

Scellement hermétique

Disponible en version ATEX (opcional)

(Ex II 1GD Ex ia IIC T4...T6 Ga)

(Ex II 1GD Ex ia IIIC T135°C Da)

Available in ATEX version (optional)

Disponible version ATEX (optionnel)

Características técnicas

Technical Data

Caractéristiques Techniques

Clase de precisión

Accuracy class

C3-C4

Classe de précision

Sensibilidad

Rated output

$2 \pm 0.1\% \text{ mV/V}$

Sensibilité

Vmin

Vmin

Emax/15000

Vmin

Tensión de alimentación

Excitation Voltage

5÷15 V

Tension d'alimentation

Resistencia de entrada

Input Resistance

$350 \pm 5 \Omega$

Résistance d'entrée

Resistencia de salida

Output resistance

$350 \pm 3 \Omega$

Résistance de sortie

Margen de temperatura compensado

Temperature Compensation

-10° C / +40° C

Compensation de température

Límites de temperatura

Temperature limits

-40° C / +80° C


Limites de température

Resistencia de aislamiento

Insulation resistance

> 5000 M Ω

Résistance d'isolement

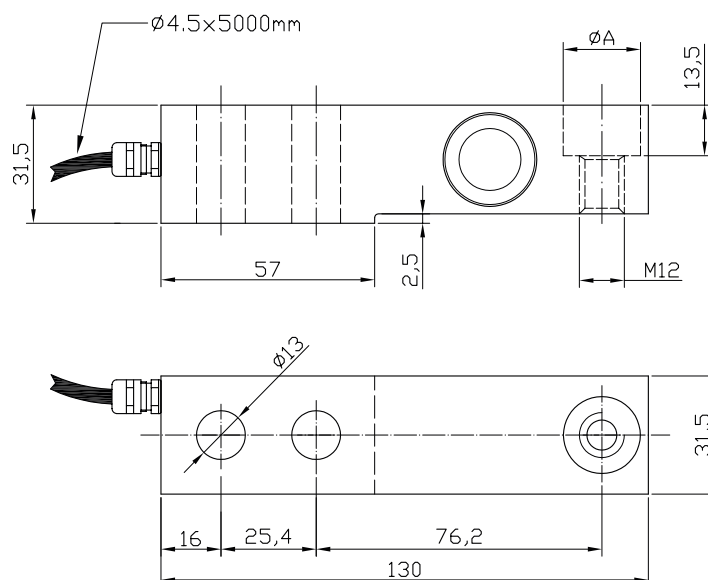

Capacidad (Kg)

Capacity - Capacité

A

500 / 750 / 1000 / 1500 $\varnothing 13,5$

550 / 1100 / 1760 / 2000 $\varnothing 20,6$

Conexión


Connections

Connexions

Sense opcional

Optional Sense

Sense optionnel



Rojo Red / Rouge
Amarillo Yellow / Jaune

Verde Green / Vert

Negro Black / Noire
Azul Blue / Bleu

Blanco White / Blanc

- Pantalla
Shield
Écran



SENSOCAR

Tel: (+34) 93 780 44 99 | Fax: (+34) 93 780 39 72 | comercial@sensocar.com | www.sensocar.com


Dimensiones en mm

Size in mm - Dimensions en mm

Pata autocentrante de altura regulable a bola

Load foot with adjustable height


Pied autocentrante de hauteur réglable à bille

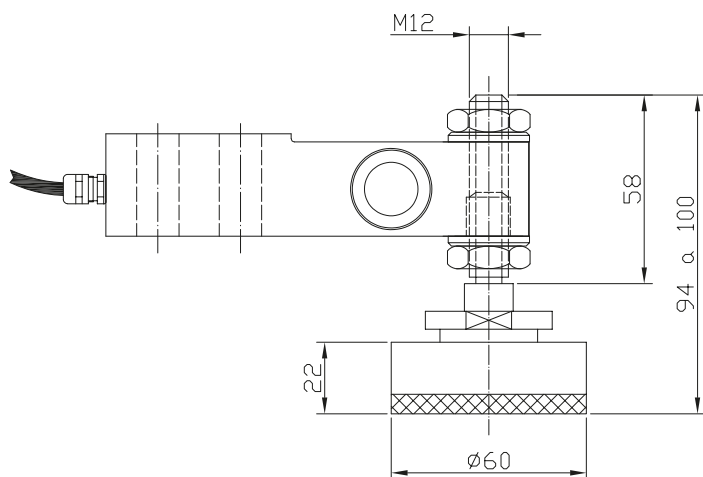

Silent-Block (500-550 kg)

Silent-Block (500-550 kg)


Silent-Bloc (500-550 kg)

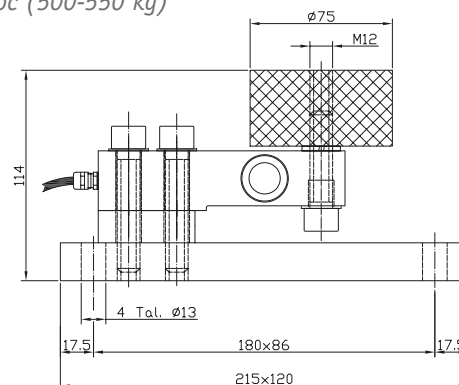

Silent-Block (750-2000 kg)

Silent-Block (750-2000 kg)


Silent-Bloc (750-2000 kg)

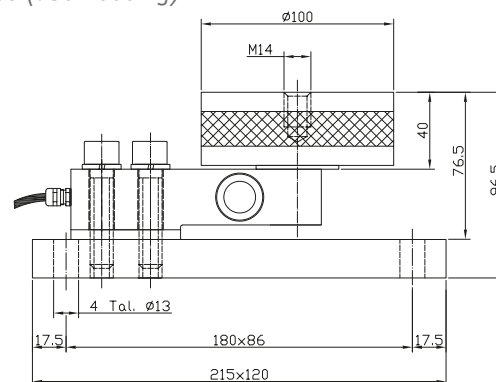

Sistema antivuelco tipo A

Tank weigh module type A

Système Anti-renversement type A

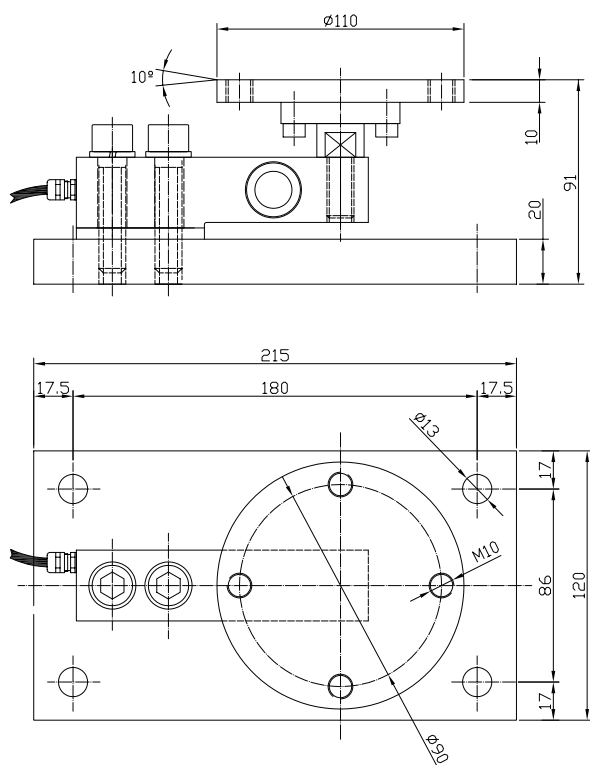

Sistema antivuelco tipo B

Tank weigh module type B

Système Anti-renversement type B

