

DGT4X

DGT4X - HIGH SPEED WEIGHT TRANSMITTER



Weight transmitter for weight transfer to PLC via fieldbus, analog output or RS485.

It allows the reading and diagnostics of each load cell or each connected scale.

Available versions:

PROFINET I/O | ETHERNET/IP | ETHERCAT |
 MODBUS TCP | CANOPEN | DEVICENET |
 PROFIBUS | ANALOG OUTPUT | RS485

Approvals:

CE-M EN 45501, OIML R-76, OIML R-61 (MID),
 OIML R-51 (MID), Australian approval

Integrated WebServer as standard for
 configuration, diagnostics and data backup.

Working in cooperation with:

LIBRA INSTRUMENTS LTD.

RODOPSKI IZVOR STR.66,A - 1618 - SOFIA - BULGARIA
 Tel. 00359 876 787981 Fax. 00359 28550131
libra@librabgnet.com

**The best solution
 for advanced industrial
 applications**

What's new compared to DGT4

- New cutting-edge processor, able to process up to 2600 weight readings per second. The high speed allows an extremely accurate weight filtering even with weighing times in the order of milliseconds.
- New cell feed circuit for greater weighing stability.
- Power supply circuit with protections, specific for industrial environments.
- Removable terminal blocks to simplify wiring in the electrical panel.
- Frontal micro-USB communication port for configuration, diagnostics and data backup.
- XSPEED TOOL: New PC software with oscilloscope function for system diagnostics and weighing filter optimization.
- 14.2 mm display.
- New configuration menu to simplify calibration and configuration.
- RS485 communication port always available on all versions.
- Up to 120 fieldbus updates per second.

ONBOARD WEB SERVER

- The integrated WEB SERVER allows complete diagnostics, calibration and remote configuration of the weight transmitter from the Ethernet network.
- *Only for PROFINET, ETHERNET/IP and MODBUS TCP/IP models.*

XSPEED TOOL

- XSPEED Tool is the PC program for optimizing the performance of the weighing system integrated in the process and industrial automation. Through XSPEED TOOL, you can set the most suitable weighing filter for your application and create custom filters, thus maximizing the speed and accuracy of weighing in static and dynamic applications.
- Free download from the Download section.




TECHNICAL FEATURES

- Power supply: 12-24Vdc
- Converter: A/D 24 bit with 4 channel
- Max scale number: 4
- Load cells connection: 4 or 6 wires (with sense)
- Operating modes:
 - Digital junction box
 - Multi-scale transmitter
 - Single-scale transmitter
- Selectable sampling rate: up to 2600 conv./sec
- Fieldbus update rate: up to 120 Hz
- Displaying: up to 800.000d
- Signal sensitivity: 0,03 $\mu\text{V/d}$ (0,3 $\mu\text{V/e}$)
- Resolution: 3.000.000 counts
- Linearization: up to 8 points
- Connectable load cells: up to 16 350 Ω cells
- Fieldbus: Profibus, Profinet, EthernetIP, EtherCAT, EthernetIP, CANopen, DeviceNet, Modbus TCP/IP.
- Serial ports:
 - 1 Micro-USB port (device) for PC configuration with "Dinitools®" and "XSpeed Tool".
 - 1 RS485 port
 - 1 RS232 port (Mod. DGT4X / DGT4XAN)
- Analog output: 16 bit (DGT4XAN Model) 4-20mA or 0-10Vdc.
- Digital outputs: n. 2 configurable OUTPUTS
- Digital inputs: n. 2 configurable INPUTS
- Certifications:
 - CE-M EN 45501
 - OIML R76 (10000e or 3000 + 3000e) / R51 / R61 MID
 - UL Listed (upon request)
 - EU Type Examination Certificate (45501:2015)
 - Australian legal for trade certificate of approval (NMI S788)
- Case: ABS, for Din bar (106 x 56 x 118 mm)
- Calibration:
 - Theoretical (mV/V)
 - With sample weights
 - Remotely by WEB SERVER
 - From the keyboard
 - From PC with "Dinitools"
- Keyboard functions:
 - Zeroing, Tare, Function mode, Manual data printing/sending, ON/Stand-by
- Program functions:
 - Setpoint, High resolution, Peak, Alibi Memory, Unit of measure conversion, Unbalancing alarm, Broken load cell exclusion
- Keyboard: mechanical with 5 keys
- Display: 14,2mm red LED


UPON REQUEST

- UL certified version

DETAIL 1

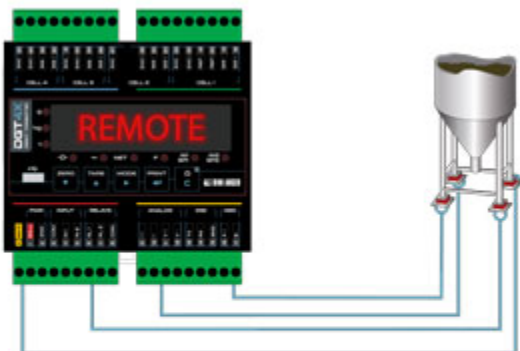

DETAIL 2

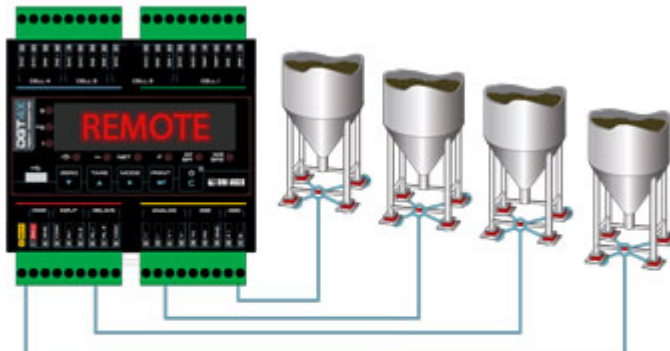

DETAIL 3

[Home](#)
[Sign out](#)
[Change parameters](#)
Release 1.0

Product	Unit	Unit	Unit	Unit	Unit
508	508	0	kg	kg	kg

PARAMETERS	CALIBRATION	COMMANDS
Unit: kg Decimals: 0 Capacity 1: 10000 Capacity 2: 0 Division 1: 1 Division 2: 0	Cal points: 1 Weight: ADC Item: 0 Point 1: 2147454 Point 2: 0 Point 3: 0	NETWORK LOCK KEYBOARD UNLOCK SCALE REBOOT WRITE PARAMETERS WRITE SETPOINTS

SETPOINTS
Setpoint 1 on
Setpoint 1 off
Setpoint 2 on
Setpoint 2 off



www.diniargeo.com

“YOUR WORLDWIDE PARTNER FOR WEIGHING”

DINI ARGEO
FRANCE sarl
France

DINI ARGEO
GMBH
Germany

DINI ARGEO
UK Ltd
United Kingdom

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
China

DINI ARGEO
OCEANIA
Australia



COMPANY HEADQUARTERS

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 843418

LIBRA INSTRUMENTS LTD.

RODOPSKI IZVOR STR.66,A - 1618 - SOFIA - BULGARIA

Tel. 00359 876 787981 Fax. 00359 28550131

libra@librabgnet.com

SALES AND TECHNICAL ASSISTANCE SERVICE